

# DRYDENE ALLTEC™ ELITE MOTOR OIL

SYNTHETIC / PASSENGER CAR MOTOR OIL



## PRODUCT DESCRIPTION

**DRYDENE ALLTEC™ ELITE MOTOR OIL** is our most advanced full synthetic passenger car and light-duty truck engine oil series. Formulated with the ultra-premium synthetic base oils and next generation additives, these oils deliver maximum protection and performance where dexos1® Gen 2 fluids are required\*\*.

## PRODUCT APPLICATION

**DRYDENE ALLTEC ELITE MOTOR OIL** is recommended for use in a wide range of vehicle and fuel types requiring GM dexos1® Gen 2 approved fluids:

- Gasoline and flex fuel (up to E85) passenger cars, light-duty trucks, sport utility vehicles and gasoline-electric hybrids.
- Engineered to safely protect engines fitted with turbochargers (including TGD engines), superchargers and emission control system catalysts.
- Engines and manufacturers specifying an API SP/ILSAC GF-6A or dexos1® Gen2 approved engine oil

\*\* SAE 0W-20 and 5W-30 viscosities


## SPECIFICATIONS

API SP, SN Plus, SN  
 ILSAC GF-6A  
 dexos1® Gen2 SAE 0W-20 License No. D130BVAK701, D130BWAK701  
 dexos1® Gen2 SAE 5W-30 License No. D130AVAK701, D130AWAK701  
 Chrysler MS-6395  
 Ford WSS-M2C947-B1 (SAE 0W-20, 5W-20)  
 Ford WSS-M2C962-A1 (SAE 0W-20, 5W-20)  
 Ford WSS-M2C946-B1 (SAE 5W-30)  
 GM 4718M (SAE 0W-20, 5W-30)  
 GM 6094M

## FEATURES AND BENEFITS

**DRYDENE ALLTEC ELITE MOTOR OILS** are formulated to surpass API SP and ILSAC GF-6A industry standards in order to meet the ever-increasing performance and emissions requirements of today's technologically advanced engine systems:

- Protects Turbocharged Gasoline Direct Injection (TGDI) engines that may experience Low-Speed Pre-Ignition (LSPI).
- Improved control of sludge, high temperature deposit formation and viscosity increase than previous generation gasoline engine oils
- Robust anti-wear and friction control additives help protect timing chains and valvetrains from stretching and surface degradation
- Maintains more consistent viscosity than previous generation chemistry which helps extend both drain intervals and engine life.
- Helps reduce fuel costs while still providing excellent protection against engine wear under the most extreme operating conditions.

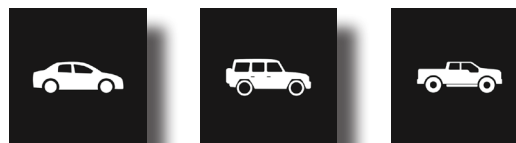

## TYPICAL TECHNICAL PROPERTIES

PROPERTY	TEST METHOD	SAE 0W-20	SAE 5W-20	SAE 5W-30
Viscosity @ 40°C (cSt)	ASTM D445	44.7	48.9	62.0
Viscosity @ 100°C (cSt)	ASTM D445	8.5	8.7	10.9
Viscosity Index	ASTM D2270	170	158	169
Flash Point, °C/°F	ASTM D92	226/439	224/435	227/441
Pour Point, °C/°F	ASTM D5950	-45/-49	-45/-49	-45/-49
Cold Cranking Simulator @ °C, cP	ASTM D5293	5750 (-35)	4460 (-30)	4410 (-30)
High Temp/High Shear Vis @ 150°C, cP	ASTM D5481	2.7	2.7	3.2
NOACK Volatility, % loss	ASTM D5800	12.9	11.8	12.0
High Temperature Foaming, static foam	ASTM D6082 (Opt A)	20/0	10/0	15/0
TBN, mg KOH/g	ASTM D2896	7.9	7.1	7.8

This product is not expected to have any adverse health implications when used for its intended purposes. Always wear protective gloves when handling used oil and dispose of properly. Avoid contact with skin and wash immediately with soap and water should any contact occur. Always follow manufacturers recommendations for fluid viscosity and service category. Drydene Performance Products, Inc. assumes no responsibility for product misuse or improper application. For a copy of this product's Safety Data Sheet (SDS), visit [www.DRYDENE.com](http://www.DRYDENE.com)

